

NEMO

NEUTRAL & NORDIC




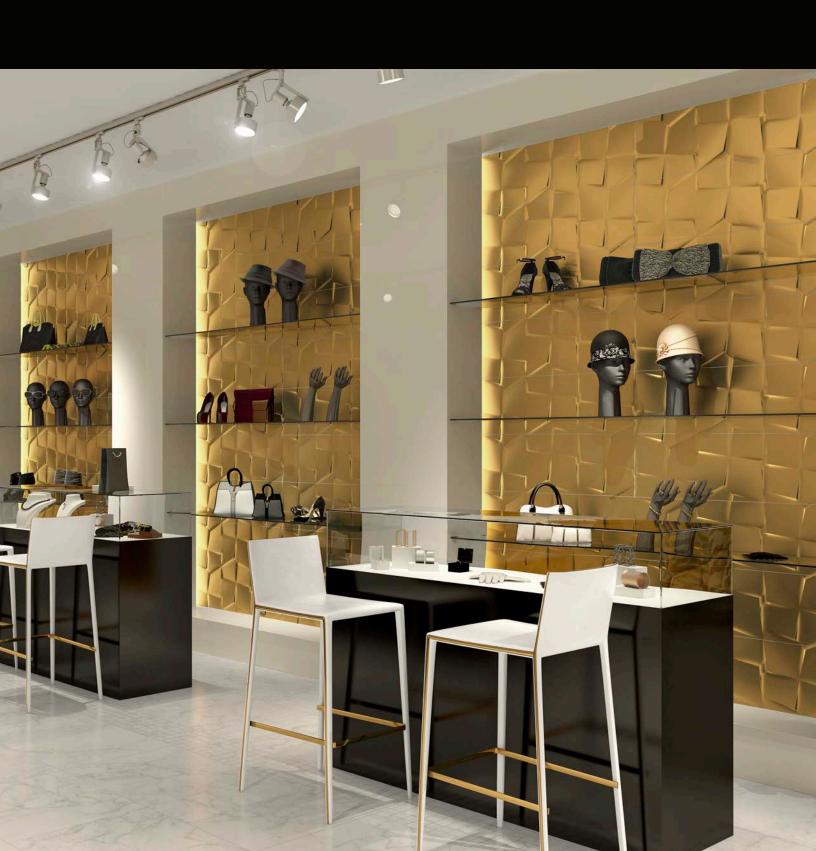


NEUTRAL COLORS

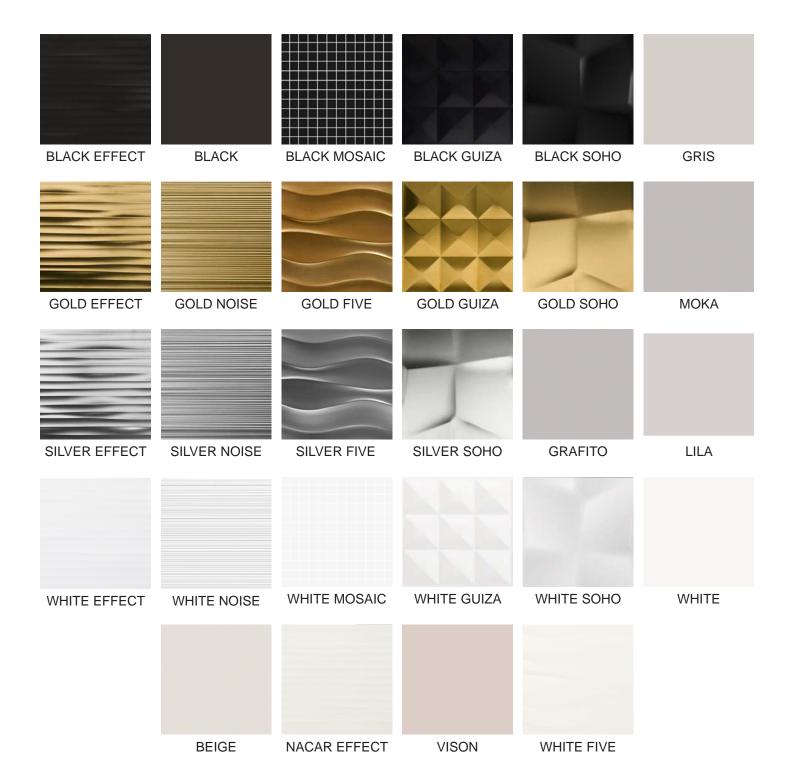

NORDIC COLORS

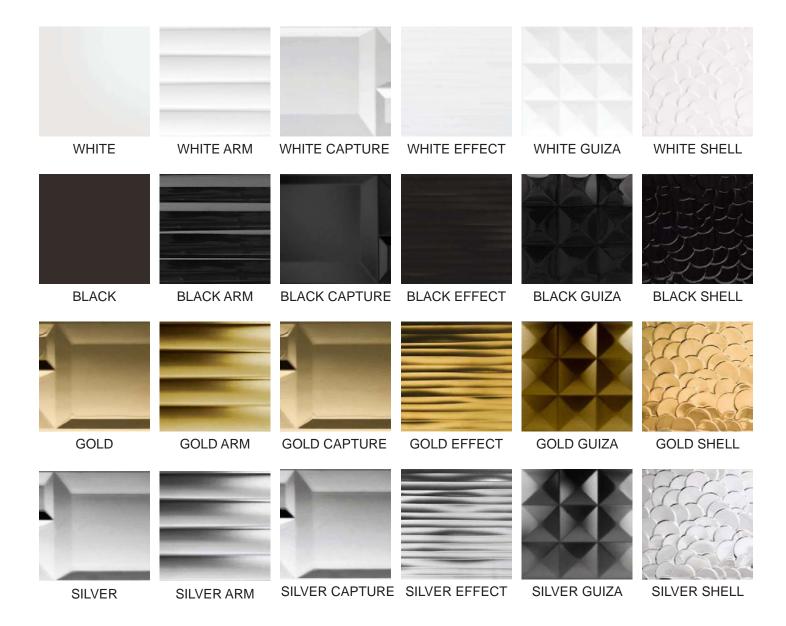

NORDIC COLORS

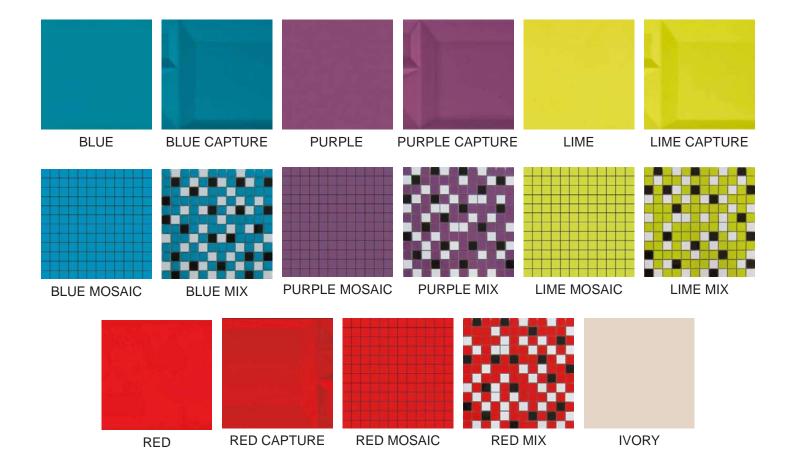

NEUTRAL & NORDIC


SIZES








NEUTRAL PATTERNS

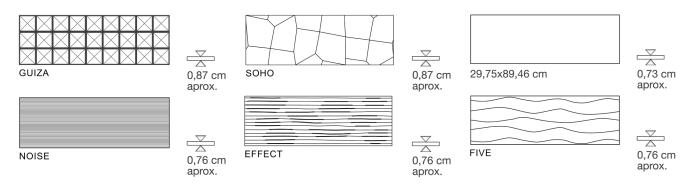

12x12 MOSAIC SHEET

NORDIC PATTERNS

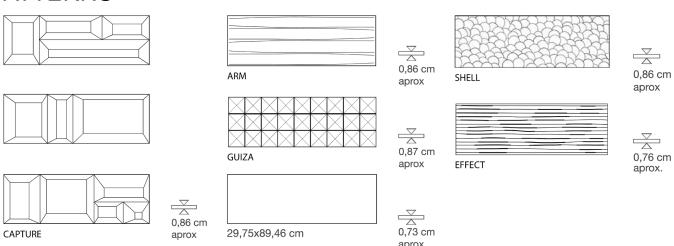

^{**} Please note that patterns are not available in all colors, for further assistance please speak with a sales representative

NEUTRAL & NORDIC

TECHNICAL INFORMATION

	STANDARD TEST METHOD	WALL TILES (GROUP BIII)
DIMENSIONS (LENGTH & WIDTH)	ISO 10545.2	1 ≤ 12 CM: ±0.75 % 1 > 12 CM: ± 0.5%
RECTANGULARITY	ISO 10545.2	± 0.5%
STRAIGHTNESS OF SIDES	ISO 10545.2	± 0.3%
		A) +0.5% -0.3% *
	ISO 10545.2	B) +0.5% -0.3%
SURFACES FLATNESS		c] ± 0.5%
THICKNESS	ISO 10545.2	± 10%
WATER ABSORTION	ISO 10545.3	≥ 1.0%
MODULUS OF RUFTURE, IN m	ISO 10545.4	≥ 7.5 : Min. 600 < 7.5 : Min. 200
BREAKING STRENGTH, N/mm*2	ISO 10545.4	≥ 7.5 : Min. 15 N/mm*2 < 7.5 : Min. 12 N/mm*2
LINEAR THERMAL EXPANSION	ISO 10545.8	available method
RESISTANCE TO THERMAL SHOCK	ISO 10545.9	available method
RESISTANCE TO CRAZING	50 1/545.11	resistant
FROST RESISTANCE	ISO 16545.12	required
SMALL COLOUR DIFFERENCES	ISO 18545.16	available method
MOISTURE EXPANSION	SO 16545.10	available method
RESISTANCE TO CHEMICAL PRODUCTS (ACIDS AND ALKALIS	ISO 16545.13	available method
OF LOW CONCENTRATION)		
RESISTANCE TO CHEMICAL		
PRODUCTS (TO HOUSEHOLD		
CLEANING PRODUCTS AND	ISO 16545.13	Min. GB
SWINING POOL SALTS)		
STAINING RESISTANCE IN GLAZED TILES	SO 16545.14	E≤







NEUTRAL & NORDIC