


 NEMO

SUPER WHITE



SUPER WHITE


CERAMIC WALL TILE

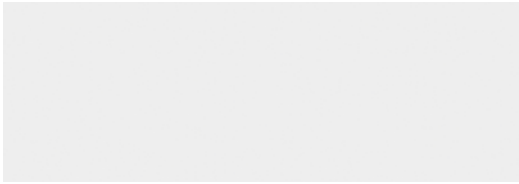


SUPER WHITE



GEOMETRIC

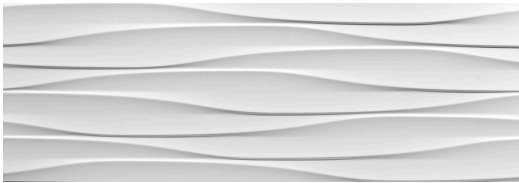

WIND

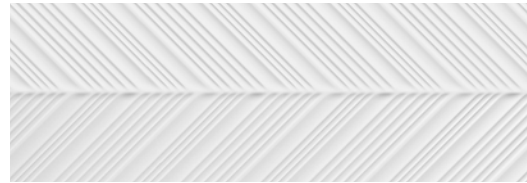


SPIRE


* FINISHES AVAILABLE IN BOTH GLOSSY AND MATTE.

SUPER WHITE

SIZES



12" x 24"



12" x 36"

TECHNICAL INFORMATION

| Specification | Test | Required Value | Value |
|--------------------------|---------------------|----------------------------|----------------------|
| Water Absorption | UNE-EN ISO 10545-3 | > 10% | 12% < E < 18% |
| Break Strength | UNE-EN ISO 10545-4 | 600 N | 650 N |
| Modulus of Rupture | UNE-EN ISO 10545-4 | 12 N/mm ² | 15 N/mm ² |
| Coefficient of Expansion | UNE-EN ISO 10545-8 | Minimum Class 3 | Class 5 |
| Thermal Resistance | UNE-EN ISO 10545-9 | Manufacturer's declaration | Resists |
| Crazing Resistance | UNE-EN ISO 10545-11 | Required | Resists |
| Frost Resistance | UNE-EN ISO 10545-12 | NOT APPLICABLE | Not Frost Resistant |
| Chemical Resistance | UNE-EN ISO 10545-13 | | GA, GLA, GHA |
| Stain Resistance | UNE-EN ISO 10545-14 | Minimum Class 3 | Class 5 |





NEMO
NEMOTILE.COM

SUPER WHITE