

 NEMO

NOUVEAU



NOUVEAU



NOUVEAU



NOUVEAU COLORS



IVORY



SILVER



PEWTER



SEPIA



IVORY
MOSAIC



SILVER
MOSAIC



PEWTER
MOSAIC



SEPIA
MOSAIC



IVORY HEX
BORDER



SILVER HEX
BORDER



PEWTER HEX
BORDER



SEPIA HEX
BORDER



IVORY HEX




SILVER HEX



PEWTER HEX



SEPIA HEX




V3

Moderate Variation


NOUVEAU SIZES



3.5x14



9.5x11 hexagon

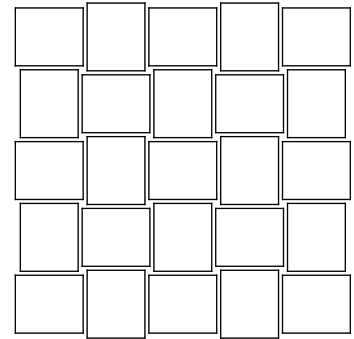

basket weave mosaic
on 12x12 sheet



6x36



NOUVEAU



NOUVEAU

GRES PORCELLANATO SMALTATO DIGITALE
DIGITAL GLAZED PORCELAIN STONEWARE
GRES CERAME EMAILLE DIGITAL
DIGITAL GLASIERTES FEINSTEINZEUG
КЕРАМОГРАНИТ, ГЛАЗУРЬ НАНЕСЕНА ЦЫФРОВЫМ СПОСОБОМ

ASTM C1028 > 0,6
CLASSE 4



V4

ESAGONA

Proprietà fisico chimiche/Physical-chemical properties Caracteristiques physiques-chimiques/physische Chemische eigenschaften	Norme/Norms Noemes Normen	Valori presvalori prescritti / Required values Valeurs exigees / Vorgeschriebene werte		
Dimensioni Sizes Format Format	ISO 10545-2	Lunghezza e larghezza Length and width Longueur et largeur Länge und Breite	(± 0,75% 190 cm2 < 410 ≤) (± 0,6 % > 410 cm2)	(± 0,75% 190 cm2 < 410 ≤) (± 0,6 % > 410 cm2)
		Rettilinearità spigoli Linearity Rectitude de l'angularité Kantengeradheit	(± 0,5% max)	(± 0,5% max)
		Ortogonalità Wedging Orthogonalité Rechtwinkligkeit	(± 0,6% max)	(± 0,6% max)
		Planarità Warpage Planéité Ebenflächigkeit	(± 5% max)	(± 5% max)
Spessore Thickness Épaisseur Stärke	ISO 10545-2	(± 5% max)	10 mm	
Qualità della superficie Appearance quality Qualité de la surface Qualitätsanforderungen für die Oberfläche	ISO 10545-2	95% piastrelle accettabili nel lotto 95 % acceptability of tiles in the lot 95% des carreaux acceptables dans le lot de production 95% der Fliesen erfüllen erste Sortierung	Conforme Complies with standards Conforme aux normes Normgerecht	
Assorbimento d'acqua Water absorption Absorption d'eau Wasseraufnahme	ISO 10545-3	< 0,5%	Conforme Complies with standards Conforme aux normes Normgerecht	
Resistenza alla flessione Breaking strength Résistance à la flexion Biegefestigkeit	ISO 10545-4	≥ 35 N/mm ²	≥ 35 N/mm ²	
Resistenza agli sbalzi termici Thermal shocks resistant Résistance aux variations thermiques Temperaturwechselbeständigkeit	ISO 10545-9	Requisito non previsto Not provided requirement Qualité pas previe Erfordernis nicht vorgesehen	Resistente Resistant Résistant Widerstandsfähigkeit	
Resistenza al gelo Frost resistance Résistance au gel Froständigkeit	ISO 10545-12	Nessuna alterazione No alteration Aucune alteration Keine Änderung	Resistente Resistant Résistant Widerstandsfähigkeit	
Resistenza all'abrasione di piastrelle smaltate da pavimento Abrasion resistance for glazed tiles Résistance à l'abrasion des carreaux émaillés Abriebfestigkeit von glasierten Fliesen	ISO 10545-7	Come indicato dal produttore As indicated by manufacturer Comme indiqué par le producteur Wie vom Hersteller angegeben	PEI IV	
Coefficiente di dilatazione termica lineare (50°/400°) Linear thermal expansion coefficient (50°/400°) Dilatation thermique linéaire (50°/400°) Lineare Wärmeausdehnung (50°/400°)	ISO 10545-8		Metodo disponibile Test method available Méthode disponible Verfügbares Verfahren	
Resistenza al cavillo di piastrelle smaltate Crazing resistance of glazed tiles Résistance à la tréaillure des carreaux émaillés Haarrißbeständigkeit der glasierten Fliesen	ISO 10545-11		Resistente Resistant Résistant Widerstandsfähigkeit	
Durezza della Superficie Surface resistance Dureté de la surface Ritzhärte der Oberfläche	EN 101		MOHS 6,5	
Resistenza alle basse concentrazioni di acidi e alcali, a prodotti di uso domestico e agli additivi per piscina Resistant to low concentration of acid and alkali, household chemicals and additive for swimming pool Résistance à l'agression acide et basique, résistance aux produits ménagers chimiques et additifs pour piscine Widerstandsfähigkeit gegenüber Haushaltschemikalien und Zusatzstoffe für Schwimmbäder	ISO 10545-13	Come indicato dal produttore As indicated by manufacturer Comme indiqué par le producteur Wie vom Hersteller angegeben	Classe GLA Class GLA Classe GLA Gruppe GLA	
Resistenza ai prodotti chimici di uso domestico e agli additivi per piscine Resistance to domestic chemical products and additives for swimming pools Résistance aux produits d'emploi domestiques et additifs pour piscines Widerstand gegen Haushaltschemikalien, Badewasserzusätze	ISO 10545-13	GB min.	Classe GA Class GA Classe GA Gruppe GA	
Resistenza alle macchie Resistance to staining Résistance aux taches Fleckbeständigkeit	ISO 10545-14	CLASSE min. 3	Classe 5 Class 5 Classe 5 Gruppe 5	
Coefficiente di attrito Coefficient of friction Coefficient de frottement Reibungskoeffizient	DIN 51130		R10	
Scivolosità Slipperness Glissement Rutschfestigkeit	DIN 51097		Classe B Class B Classe B Gruppe B	
	B.C.R.A.	μ > 0,40 (Wet) μ > 0,40 (Dry)	Conforme Complies with standards Conforme aux normes Normgerecht	
	DCOF Acu Test	≥ 0,42	Conforme Complies with standards Conforme aux normes Normgerecht	
Variazione cromatica Colour shading Variations chromatiques Chromatische Abweichungen			V 4	

 NEMO



 **NEMO**
NEMOTILE.COM

NOUVEAU