



 **NEMO**
METALLICA



METALLICA COLORS

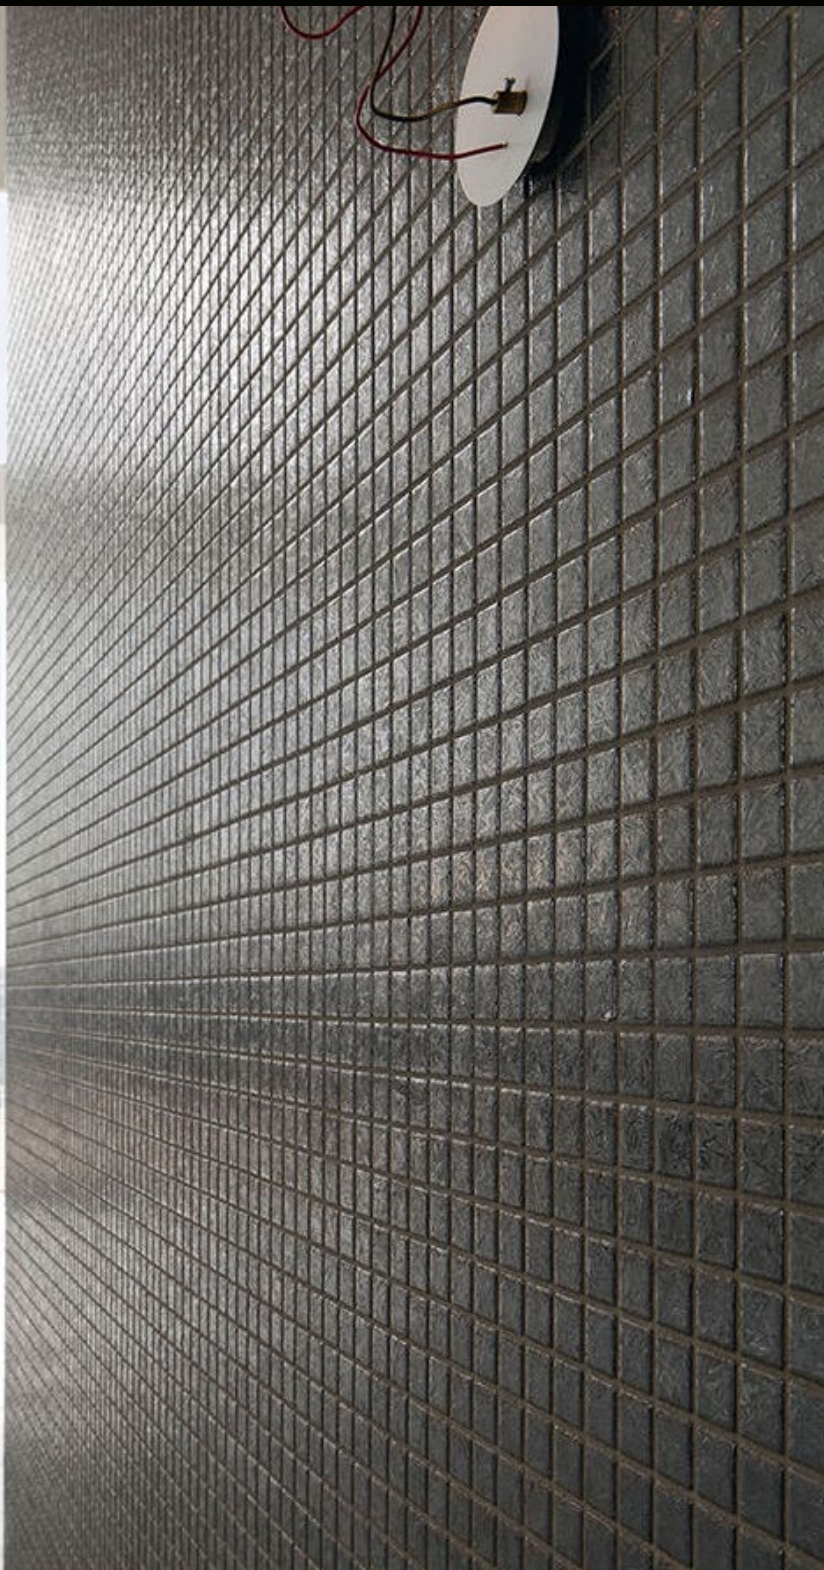


ALLUMINIO
MTL 4006
1/2 x 1/2




ALLUMINIO
MTL 7006
1 x 1



ALLUMINIO
MTL 2006
2 x 4



PIRITE
MTL 4005
1/2 x 1/2



PIRITE
MTL 7005
1 x 1



PIRITE
MTL 2005
2 x 4




RIFLESSI
MTL 4011
1/2 x 1/2




RIFLESSI
MTL 7011
1 x 1



RIFLESSI
MTL 2011
2 x 4




BRONZO
MTL 4004
1/2 x 1/2




BRONZO
MTL 7004
1 x 1




BRONZO
MTL 2004
2 x 4




CRISTALLI
MTL 4009
1/2 x 1/2




CRISTALLI
MTL 7009
1 x 1



CRISTALLI
MTL 2009
2 x 4




CUPRITE
MTL 4007
1/2 x 1/2




CUPRITE
MTL 7007
1 x 1




CUPRITE
MTL 2007
2 x 4




CRISTALLI RUST
1/2 x 1/2




CRISTALLI RUST
1 x 1



CRISTALLI RUST
2 x 4




ACCIAIO*
MTL 412
1/2 x 1/2




V1

Uniform appearance


METALLICA SIZES




ORO
4000
1/2 x 1/2




ORO
7000
1 x 1




PLATINO
4000
1/2 x 1/2




PLATINO
7000
1 x 1



.5x.5 mosaic on
12x12 sheet



1x1 mosaic on
12x12 sheet



2x4 mosaic on
12x12 sheet



TECHNICAL INFORMATION

SURFACE DIMENSIONS AND QUALITIES	STANDARD	TOLERANCES	RESULTS
NET MOUNTED / SIDES	ISO 10545-2	SIDES	± 0.2% ± 4%
SURFACE QUALITIES	ISO 10545-2	< 95%	< 95%
STRAIGHTNESS OF EDGES	ISO 10545-2	± 0.5%	± 0.4%
SQUARENESS	ISO 10545-2	± 0.6%	± 0.4%
FLATNESS	ISO 10545-2	± 0.5%	± 0.4%
PHYSICAL PROPERTIES		REQUIRED CONDITIONS	
WATER MASS ABSORBED IN %	ISO 10545-3 ASTM C373	0.5% < E ≤ 3% APPENDICE H	≤ 1% < 3% class P2
BREAKING STRENGTH IN N BREAKING STRENGTH IN LBS.	ISO 10545-4 ASTM C648	700 MIN. APPENDICE H ≥ 250 LB	> 1800 > 250 LB
BENDING STRENGTH IN N/mm ²	ISO 10545-4	30 MIN. APPENDICE H	> 50 N/mm ²
IMPACT RESISTANCE	ISO 10545-5	TESTING METHOD AVAILABLE	> 0.6 (APPENDICE P)
ABRASION RESISTANCE	ISO 10545-7	INDICATED BY PRODUCER	SEE COLOR NOTES
COEFFICIENT OF LINEAR THERMAL EXPANSION	ISO 10545-8	TESTING METHOD AVAILABLE	< 5x10 ⁻⁶ /°C
THERMAL SHOCK RESISTANCE	ISO 10545-9 ASTM C484	TESTING METHOD AVAILABLE	GUARANTEED
MOISTURE EXPANSION	ISO 10545-10	TESTING METHOD AVAILABLE	< 0.04%
CRAZING RESISTANCE	ISO 10545-11 ASTM C424	REQUIRED	GUARANTEED
FROST RESISTANCE	ISO 10545-12 ASTM C1026	REQUIRED	GUARANTEED
COEFFICIENT OF FRICTION (SLIPPERINESS)	B.C.R.A.	> 0.40	
COEFFICIENT OF FRICTION	DIN 51130	INDICATED BY PRODUCER	ON REQUEST
COEFFICIENT OF FRICTION (INCLUDING INCLINE)	DIN 51097	INDICATED BY PRODUCER	
CHEMICAL PROPERTIES		REQUISITES	
RESISTANCE TO CHEMICAL PRODUCTS (HOUSEKEEPING AND SWIMMING POOL ADDITIVES)	ISO 10545-13	GB MIN.	GB MIN.
RESISTANCE TO DILUTED ACID AND ALKALI SOLUTIONS	ISO 10545-13	INDICATED BY PRODUCER	GLB MIN.
RESISTANCE TO HIGHLY CONCENTRATED ACID AND ALKALI SOLUTIONS	ISO 10545-13	TESTING METHOD AVAILABLE	ON REQUEST
STAIN RESISTANCE	ISO 10545-14 ASTM C1378	CLASS 3 MIN. REQUIRED	3 MIN. (APPENDICE P) GUARANTEED
LEAD AND CADMIUM RELEASED	ISO 10545-15	TESTING METHOD AVAILABLE	ON REQUEST
RESISTANCE OF COLOURS TO SUNLIGHT	DIN 51094	NOT PROVIDED	GUARANTEED
FIRE RESISTANCE	-	DECISION 96/603/CE	CLASS A1



NEMO
NEMOTILE.COM

METALLICA