

NEMO
TILE + STONE
SYRENA



SYRENA



SYRENA




SYRENA COLORS

CERAMIC WALL TILE

FLAT

CONVEX

CONCAVE

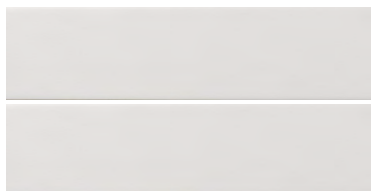


MILK



MILK



MILK

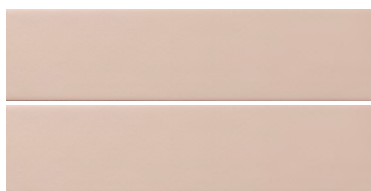

SHELL



SHELL



SHELL




SAGE




SAGE



SAGE

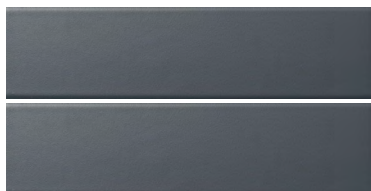


DEEP

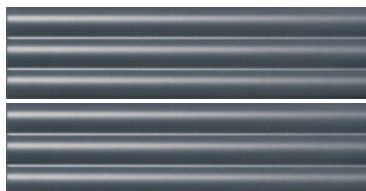


DEEP



DEEP

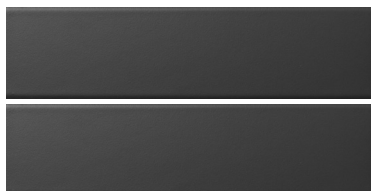

MIDNIGHT

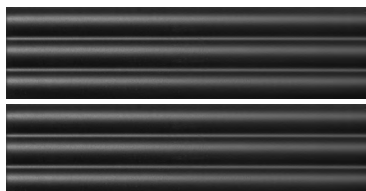


MIDNIGHT



MIDNIGHT



CURRANT

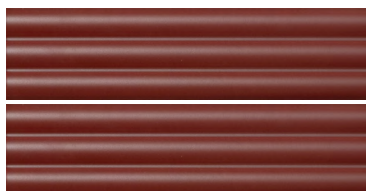

CURRANT



CURRANT

SYRENA




TECHNICAL FEATURES

		white body wall tiles		
		STANDARD	REQUIRED STANDARDS	SYRENA
DIMENSIONS	LENGTH AND WIDTH	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
	THICKNESS	UNI-EN ISO 10545-2	± 10%	COMPLIANT
	STRAIGHTNESS OF SIDES	UNI-EN ISO 10545-2	± 0.3%	COMPLIANT
	RECTANGULARITY	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
	SURFACE FLATNESS - CENTER CURVATURE	UNI-EN ISO 10545-2	± 0.5% - 0.3%	COMPLIANT
	SURFACE FLATNESS - SIDE CURVATURE	UNI-EN ISO 10545-2	± 0.5% - 0.3%	COMPLIANT
	SURFACE FLATNESS - WARPING	UNI-EN ISO 10545-2	± 0.5%	COMPLIANT
BENDING STRENGTH	BREAKING OF RUPTURE	UNI-EN ISO 10545-4	> 600 N (≥ 7,5 MM) > 200 N (< 7,5 MM)	COMPLIANT
	MODULUS OF RUPTURE	UNI-EN ISO 10545-4	> 12 N/MM (≥ 7,5 MM) > 15 N/MM (< 7,5 MM)	COMPLIANT
RESISTANCE TO ABRASION OF GLAZED TILES		UNI-EN ISO 10545-7	-	-
WATER ABSORPTION		UNI-EN ISO 10545-3	> 10 %	COMPLIANT
COLOR RESISTANCE TO LIGHT		DIN 51094	-	RESISTANT
LINEAR THERMAL EXPANSION COEFFICIENT (100°C)		UNI-EN ISO 10545-8	TEST METHOD AVAILABLE	TEST METHOD AVAILABLE
THERMAL SHOCK RESISTANCE		UNI-EN ISO 10545-9	-	RESISTANT
FROST RESISTANCE		UNI-EN ISO 10545-12	-	-
CRAZING RESISTANCE		UNI-EN ISO 10545-11	-	RESISTANT
RESISTANCE TO STAINS		UNI-EN ISO 10545-14	CLASS 3 MIN.	CLASS 5
CHEMICAL RESISTANCE		UNI-EN ISO 10545-13	GB MIN.	GUARANTEED (GA GLA GHA)
LEAD AND CADMIUM GIVEN OFF		UNI-EN ISO 10545-15	TEST METHOD AVAILABLE	TEST METHOD AVAILABLE
REACTION TO FIRE		EN 13501-1	-	A1
SLIP RESISTANCE (RAMP TEST)		DIN 51130	-	-
SLIP RESISTANCE (PENDULUM TEST)		BS 7976-2	-	-
SLIP RESISTANCE (PENDULUM TEST)		AS/NZS 4586	-	-
WET DYNAMIC COEFFICIENT OF FRICTION (DCOF)		ANSI A137.1 - BOT 3000	-	-
SHADE VARIATION		-	-	V1

GLAZED WHITE-BODIED POROUS SINGLE-FIRED WALL TILES

Dry-pressed ceramic tiles with water absorption Eb > 10%. Quality specification, according to control test of EN14411:2013 appendix L group BIII GL

SIZE




3" x 11.8"



Flat

Convex

Concave

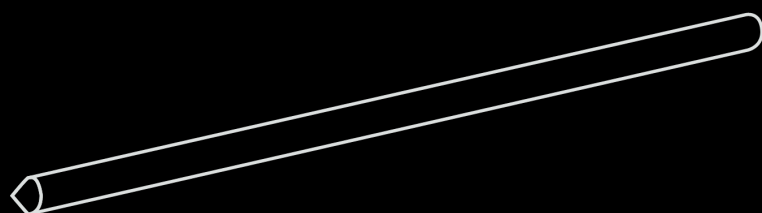

0.5" x 11.8" Jolly



NEMO
TILE + STONE
SYRENA