
## 15 Colors | 1 Size | 2 Finishes

## HUDSON BRICK WALLE













HUDSON BRICK HANDMADE LOOK WALL TILE

| 112     |     |
|---------|-----|
| 1.73577 |     |
| 100     |     |
|         |     |
|         |     |
|         | 100 |

|             |     | 5     |
|-------------|-----|-------|
|             |     | 1.2.1 |
| 2.3 - 1 - L | No. |       |
|             |     |       |
|             |     |       |
|             |     | 1     |
|             |     |       |

|             | 00 |
|-------------|----|
|             |    |
|             |    |
| In the      |    |
| 12.18       |    |
| CONTRACT OF |    |
| 14          |    |

Beach Sand (V3)

**Red Pepper (V4)** 



Driftwood (V3)

V3/V4 Variation | Glossy & Matte Finish

## HUDSON BRICK

Hudson Brick is a glazed brick tile that is made by hand giving a unique character to each tile.



Gloss White (V3)

Tin Type (V4)



Suede (V3)



Old Bronze (V4)

Aruba (V4)



Constellation (V4)



Cut Lawn (V4)



Deep Water (V4)



High Line (V4)

Night Cloud (V3)



Anthracite (V3)










| Technical Information           |                          |                                   |  |  |
|---------------------------------|--------------------------|-----------------------------------|--|--|
| PROPERTY                        | STANDARD                 | RESULT                            |  |  |
| Efflorescence                   | ASTM C-67                | None                              |  |  |
| Chipping                        | ASTM C - 1088            | <2%                               |  |  |
| Size                            | ASTM C - 1088            | Meets the standard                |  |  |
| Warpage                         | ASTM C - 1088            | Meets the standard                |  |  |
| Modulus of Rupture              | ASTM C - 67              | > 500 lbs/sq inch                 |  |  |
| Compressive Strength            | ASTM C - 67              | 10,000 lbs/sq. inch               |  |  |
| Absorption                      | ASTM C - 67              | < 3%                              |  |  |
| Saturation Coefficient          | ASTM C - 1088            | < 3% - N/A                        |  |  |
| Freeze - Thaw                   | ASTM C - 67              | Passed 3,000 cycles               |  |  |
| Freeze - Thaw Brick in concrete | ASTM C - 666 Procedure B | Passed 300 cycles, meets standard |  |  |

Size

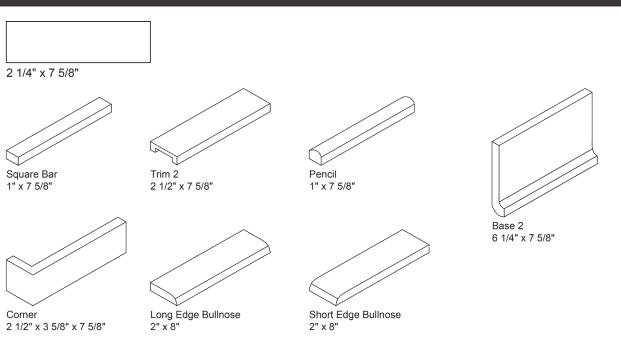

HUDSON BRICK HANDMADE LOOK WALL TILE

